



## **Ambient Air Monitoring**

**In**

**Kilkitt, Co. Monaghan**

**11<sup>th</sup> September 2002 – 4<sup>th</sup> March 2003**

## ***Contents***

Summary . . . . .	3
Introduction . . . . .	4
Time Period . . . . .	5
Siting . . . . .	5
Monitoring Methods . . . . .	6
Results. . . . .	8
Carbon Monoxide . . . . .	8
Sulphur Dioxide . . . . .	11
Nitrogen Dioxide and Oxides of Nitrogen . . . . .	15
Particulate Matter . . . . .	20
Benzene . . . . .	26
Toluene . . . . .	28
Lead . . . . .	30
Cadmium . . . . .	31
Arsenic . . . . .	31
Nickel . . . . .	31

## ***List of Figures***

Fig.1 Map of Site Location . . . . .	5
Fig.2 Carbon Monoxide 8-hour Running Average . . . . .	9
Fig.3 Carbon Monoxide . . . . .	10
Fig.4 Sulphur Dioxide 24-hour Averages . . . . .	13
Fig.5 Sulphur Dioxide Hourly Averages . . . . .	14
Fig.6 NO <sub>2</sub> Hourly Values . . . . .	18
Fig.7 NO <sub>x</sub> Hourly Values . . . . .	19
Fig.8 PM <sub>10</sub> Daily Values . . . . .	24
Fig.9. PM <sub>10</sub> and PM <sub>2.5</sub> Daily Values . . . . .	25
Fig.10 Benzene Hourly Values . . . . .	27
Fig. 11 Toluene Hourly Values . . . . .	29

### **Summary**

An assessment of air quality was carried out in Kilkitt, Co. Monaghan from 11<sup>th</sup> September 2002 until 4<sup>th</sup> March 2003.

Concentrations of carbon monoxide, nitrogen dioxide, sulphur dioxide, benzene and lead were below their respective lower assessment thresholds. Concentrations of PM<sub>10</sub> exceeded the upper assessment threshold. However, the limit for PM<sub>10</sub> was not exceeded.

	<b>Below Lower Assessment Threshold</b>	<b>Below Upper Assessment Threshold</b>	<b>Above Upper Assessment Threshold</b>	<b>Above Limit</b>
<b>PM<sub>10</sub></b>				
<b>NO<sub>2</sub></b>				
<b>CO</b>				
<b>SO<sub>2</sub></b>				
<b>Benzene</b>				
<b>Pb</b>				

Kilkitt, Co. Monaghan is in Zone D of the country. The implications of this assessment are that within those parts of Zone D for which a location such as Kilkitt may be considered representative.

- PM<sub>10</sub> will need to be monitored continuously
- Levels of CO, SO<sub>2</sub>, NO<sub>2</sub>, benzene and lead may be assessed using a combination of modelling or objective estimation techniques.

The directive states that modelling or objective estimation techniques may be used to assess ambient air quality if levels of the pollutant in that zone are below the lower assessment threshold. Continuous monitoring is required if levels exceed the upper assessment threshold.

## ***Introduction***

The European Union introduced a new approach to the monitoring, assessment and management of air quality in 1996 when it introduced a framework directive on air quality (96/62/EC, 2<sup>nd</sup> September 1996). The basic principle of the framework directive is that each country should be divided into zones and that the monitoring, assessment, management and reporting of air quality will be undertaken in relation to these zones. For the purposes of the directive, Ireland has been divided into four zones; Dublin (Zone A), Cork Urban Area (Zone B), specified population centres > 15,000 inhabitants (Zone C) and non-urban areas (Zone D).

Limit values are set for each individual pollutant which need to be met by a specific attainment date. Upper and lower assessment thresholds are also set for each pollutant, assessment thresholds are levels below the limit value, used solely in the determination of the level of monitoring needed for that pollutant in a particular zone. The extent of monitoring in any zone is determined by population size and air quality status. Measurement is mandatory in agglomerations (population >250,000) and where concentrations are above the lower assessment threshold. The greatest monitoring effort applies if concentrations are above the upper assessment threshold. Less intensive monitoring is required when concentrations are between the two assessment thresholds.

Limit values, assessment thresholds, measurement techniques and other specifics for each pollutant are defined in a series of daughter directives. The first daughter directive was adopted in April 1999 (1999/30/EC) and covered SO<sub>2</sub>, NO<sub>x</sub>, particulate matter and lead. The second daughter directive was adopted in November 2000 (2000/69/EC) and covers CO and Benzene. The directives were transposed into Irish law as the Air Quality Standard Regulations 2002 (S.I. No. 271 of 2002). To comply with the directive the Environmental Protection Agency uses mobile laboratories to carry out assessments in areas with no history of air pollution measurements. These trailers contained the following instruments:

- Monitoring instruments which continuously measure and record concentrations of the pollutants sulphur dioxide, nitrogen oxides and carbon monoxide.
- Instrument which continuously measures and records the levels of particulate matter.
- Gas chromatograph which measures levels of benzene, toluene and xylene
- Sampler for particulate matter (the official method specified for this parameter by the EU commission involves collection of the particulate matter on a filter on site followed by laboratory determination of the filter's increase in weight).
- Sampler for lead and other metals in air (collection on filter for determination in the laboratory).
- Mini meteorological station for measuring and recording temperature, relative humidity, wind speed and direction.

The sample inlets are at a height of ~3m.

For further information please contact

John Finnan, Barbara O' Leary or Ciaran O' Donnell.

### ***Time Period***

The assessment commenced on 11<sup>th</sup> September 2002 and continued until 4<sup>th</sup> March 2003.

### ***Siting***

The trailer was sited at Kilkitt Water Works, Ballybay, Co. Monaghan for the period of the assessment. The water works are located in a remote, rural part of Co. Monaghan in undulating farmland with a low density of housing. The site is 6.5 kms distant from Ballybay, 16kms from Carrickmacross and 4.2 kms from the R180 road which joins the two towns.



Fig. 1 Map of site location

Trailer 2 Location

## ***Monitoring Methods***

### *Carbon Monoxide*

Carbon monoxide was monitored using a Gas Filter Correlation CO Analyser (Model 300, Advanced Pollution Instrumentation, 6565 Nancy Ridge Drive, San Diego, California). This is a continuous analyser whose measurement technique is based on the absorption of infrared radiation by CO molecules at wavelengths near 4.7 $\mu$ m.

### *Sulphur Dioxide*

Sulphur dioxide was monitored using an Advanced Pollution Instrumentation SO<sub>2</sub> Fluorescent Analyser - Model 100A. This is a continuous analyser which measures the fluorescence of SO<sub>2</sub> molecules after excitation by ultraviolet radiation.

### *Nitrogen Dioxide and Oxides of Nitrogen*

NO<sub>x</sub> species were monitored using an Advanced Pollution Instrumentation Chemiluminescent NO/NO<sub>2</sub>/NO<sub>x</sub> Analyser - Model 200A. This is a continuous analyser which utilises the chemiluminescent reaction between nitric oxide in the sample and ozone to measure NO concentrations. Any NO<sub>2</sub> present is then reduced to NO by a molybdenum converter giving a second value for total NO<sub>x</sub> concentration. The amount of NO<sub>2</sub> present is found by subtraction.

### *Particulate Matter*

A gravimetric method was used to monitor PM<sub>10</sub> particles (as defined in European Standard, prEN12341, July 1998, Central Secretariat, rue de Stassart, 36, B-1050 Brussels). An inertial impactor sampling head restricted the sampled particles to those with a diameter less than 10 $\mu$ m. The particles were collected on preweighed glassfibre filters (Whatman GF/A, 47mm). The filters were equilibrated at constant temperature and humidity (T = 293 $\pm$ 1 $^{\circ}$ K, R.H. = 50 $\pm$ 3%) for at least 48 hours in a WTB Binder APT.Line KBF115 Climatic Chamber prior to weighing. An Ambient Dust Automatic Monitor (Model SM200CD with  $\beta$  source removed, OPSIS, S-24402, Furulund, Sweden) was used to change the filters daily at midnight.

Particulate matter was also measured using an OSIRIS Environmental Dust Monitor (Turnkey Instruments, 1&2 Dalby Court, Gadbrook Business Centre, Northwich, Cheshire CW9 7TN). This instrument uses a light scattering technique to determine the concentration of airborne particles and dust; it is not an approved method. Results are given for total suspended particulates, PM<sub>10</sub>, PM<sub>2.5</sub> and PM<sub>1</sub>.

### *Benzene*

Benzene was measured using a gas chromatograph (BTX Analyser GC855 supplied by Syntech Spectras, G. Meirstraat 11, 9728 TB Groningen, Nederland). This gas chromatograph samples automatically over a fifteen minute cycle and is equipped with a photoionisation detector.

*Lead and Other Metals*

Ambient air was pumped through a Metricel membrane filter (Gelman, 37mm, 0.8µm) situated in a calming chamber. The filters were changed every 3-4 weeks. They were digested in conc. HNO<sub>3</sub> and analysed for lead and other metals using ICP-MS (Inductively Coupled Plasma-Mass Spectrometry).

All results for CO, SO<sub>2</sub>, NO<sub>x</sub> and the continuous particulate monitor were integrated to give 1-hour average values as required for comparison with the Directive limit values.



## ***Results***

### **Carbon Monoxide**


No. of hours	3985
Missing values (including routine maintenance)	23 15
No. of measured values	3962
Percentage covered	99.99
Maximum hourly value	1.0 mg.m <sup>-3</sup>
98 percentile for hourly values	0.6 mg.m <sup>-3</sup>
Mean hourly value	0.3 mg.m <sup>-3</sup>
Maximum 8-hour mean	1.0 mg.m <sup>-3</sup>
98 percentile for 8-hour mean	0.6 mg.m <sup>-3</sup>

### **Proposed Directive Limits**


	Averaging Period	Limit Value	Date by which limit value is to be met
Limit Value for the protection of human health	8-hour running average	10 mg m <sup>-3</sup>	1 January 2005
Upper assessment threshold	8-hour running average	7 mg m <sup>-3</sup>	
Lower assessment threshold	8-hour running average	5 mg m <sup>-3</sup>	

The lower assessment threshold was not exceeded during the measurement period (Figure 2).

**Fig.2 Carbon Monoxide 8-hour Running Average  
Trailer 2 in Kilkitt 11/9/02-4/3/03**

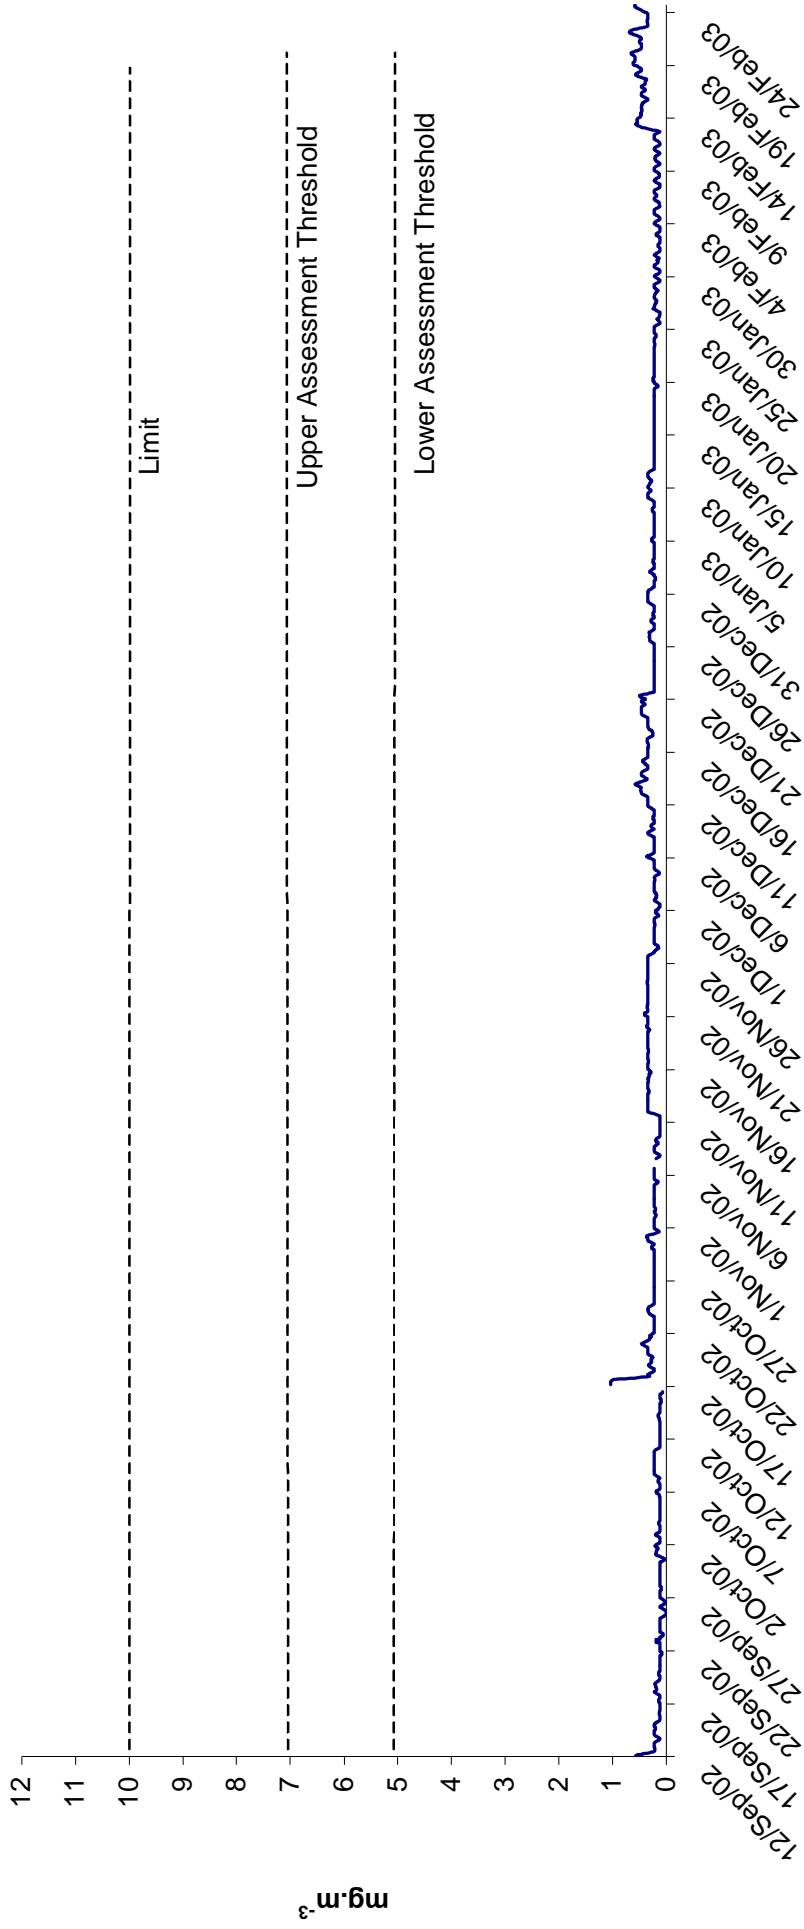

**Fig.3 Carbon Monoxide  
Trailer 2 in Kilkitt 11/9/02-4/3/03**

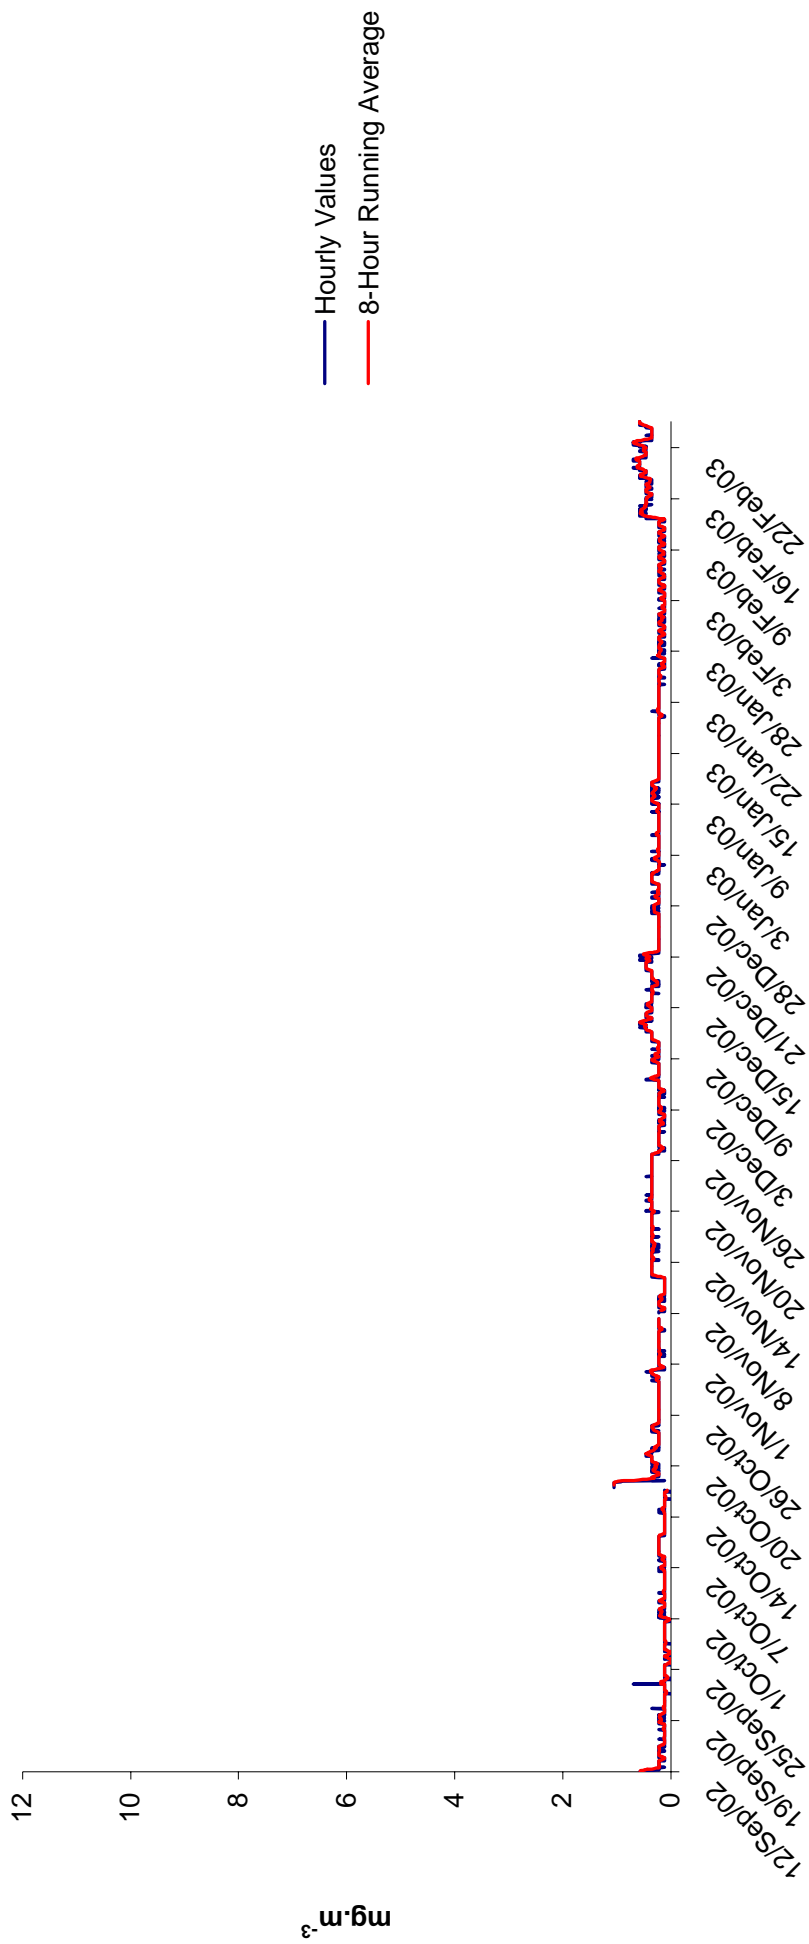

## Sulphur Dioxide

No. of hours	3985
Missing values (including routine maintenance)	165 39
No. of measured values	3820
Percentage covered	95.8
Maximum hourly value	50.5 $\mu\text{g.m}^{-3}$
98 percentile for hourly values	17.3 $\mu\text{g.m}^{-3}$
Mean hourly value	8.2 $\mu\text{g.m}^{-3}$
Maximum 24-hour value	22.1 $\mu\text{g.m}^{-3}$
98 percentile for 24-hour values	15.9 $\mu\text{g.m}^{-3}$

### Directive Limits (1999/30/EC)


	Averaging Period	Limit Value	Date by which limit value is to be met
Hourly limit value for the protection of human health	1 hour	350 $\mu\text{g m}^{-3}$ not to be exceeded more than 24 times a calendar year	1 January 2005
Daily limit value for the protection of human health	24 hours	125 $\mu\text{g m}^{-3}$ not to be exceeded more than 3 times a calendar year	1 January 2005
Limit value for the protection of ecosystems	Calendar year and winter (1 October to 31 March)	20 $\mu\text{g m}^{-3}$	19 July 2001
Alert threshold		500 $\mu\text{g m}^{-3}$ over three consecutive hours	

**Directive Limits (1999/30/EC) continued**


	Averaging Period	Limit Value	Date by which limit value is to be met
Upper assessment threshold for the protection of human health	24 hours	75 $\mu\text{g m}^{-3}$ not to be exceeded more than 3 times a calendar year	
Lower assessment threshold for the protection of human health	24 hours	50 $\mu\text{g m}^{-3}$ not to be exceeded more than 3 times a calendar year	
Upper assessment threshold for the protection of ecosystems	Calendar year and winter (1 October to 31 March)	12 $\mu\text{g m}^{-3}$	
Lower assessment threshold for the protection of ecosystems	Calendar year and winter (1 October to 31 March)	8 $\mu\text{g m}^{-3}$	

The lower assessment threshold for the protection of human health was not exceeded during the measurement period. Similarly, the hourly and daily limit values were not exceeded during the measurement period (Figures 4&5). The average SO<sub>2</sub> concentration for the assessment period just exceeds the lower assessment threshold for the protection of ecosystems.

Fig. 4 Sulphur Dioxide 24 Hour Averages  
Trailer 2 in Kilkitt 11/9/02-4/3/03

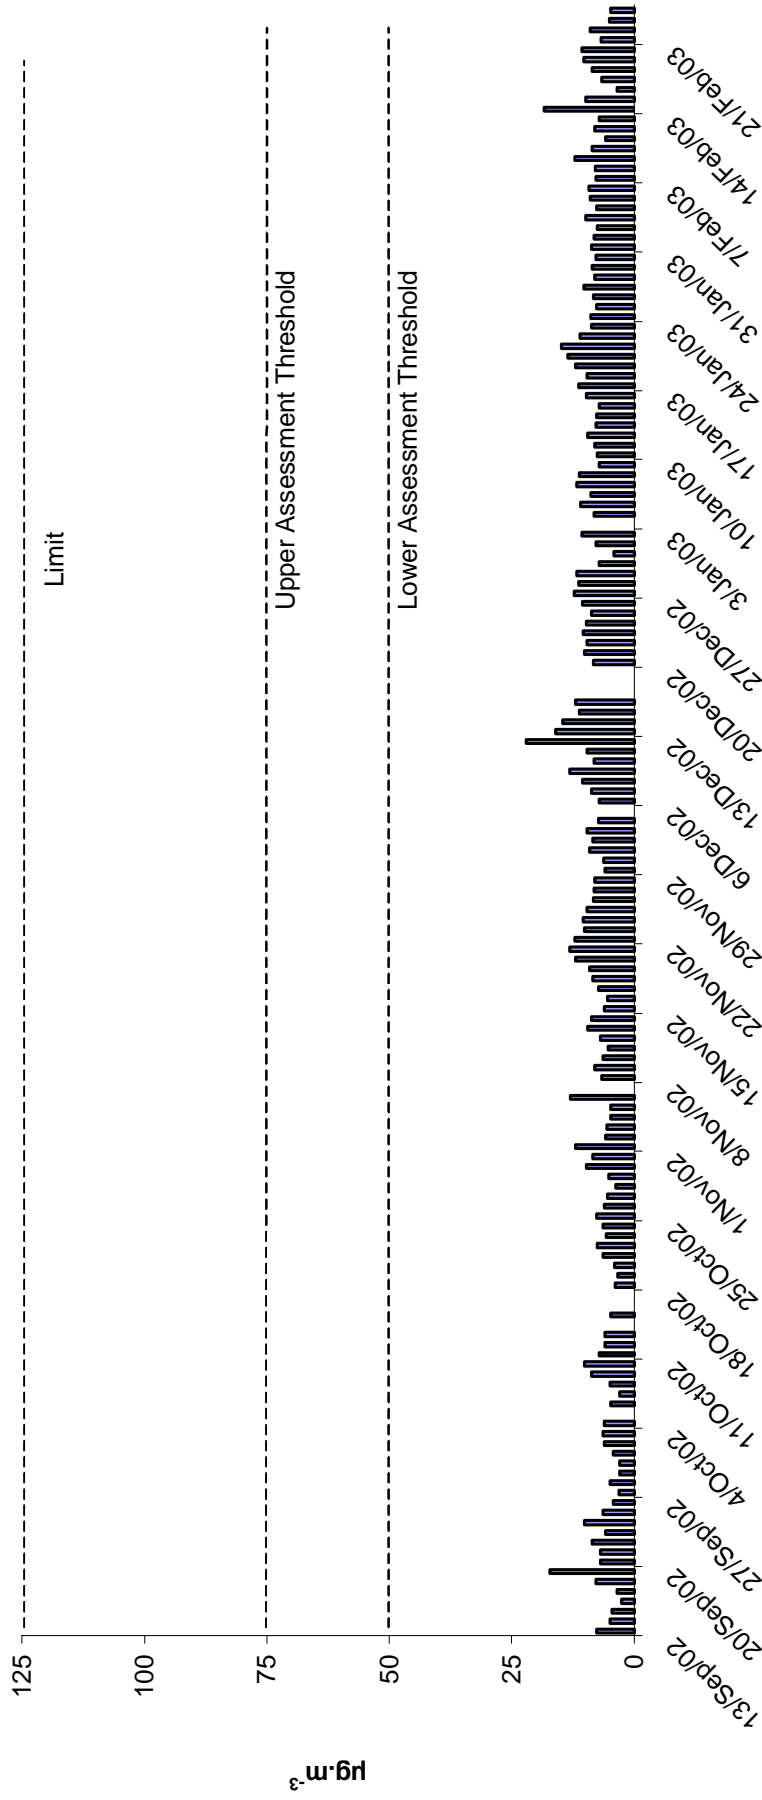

**Fig.5 Sulphur Dioxide Hourly Averages  
Trailer 2 in Kilkitt 11/9/02-4/3/03**

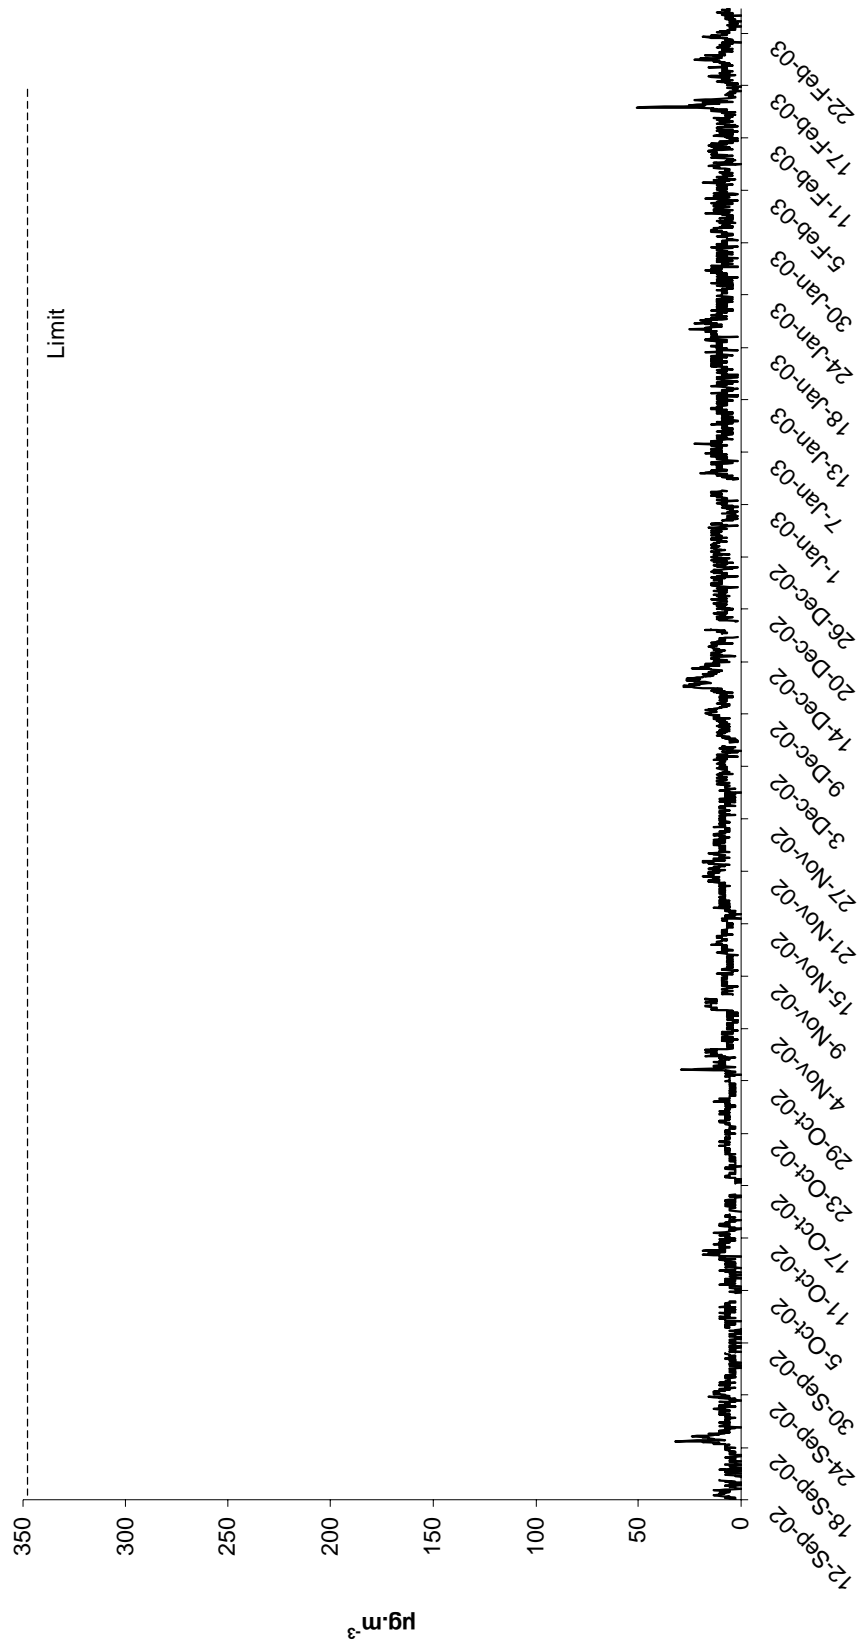

## Nitrogen Dioxide and Oxides of Nitrogen

No. of hours	3985
Missing values (including routine maintenance)	51 15
No. of measured values	3934
Percentage covered	99.9
Maximum hourly value (NO <sub>2</sub> )	69.5 µg.m <sup>-3</sup>
98 percentile for hourly values (NO <sub>2</sub> )	34.9 µg.m <sup>-3</sup>
Mean hourly value (NO <sub>2</sub> )	6.4 µg.m <sup>-3</sup>
Mean hourly value (NO <sub>x</sub> )	7.3 µg.m <sup>-3</sup> NO <sub>2</sub>

### Directive Limits (1999/30/EC)

	Averaging Period	Limit Value	Date by which limit value is to be met
Hourly limit value for the protection of human health	1 hour	200 µg m <sup>-3</sup> NO <sub>2</sub> not to be exceeded more than 18 times a calendar year	1 January 2010
Annual limit value for the protection of human health	Calendar year	40 µg m <sup>-3</sup> NO <sub>2</sub>	1 January 2010
Annual limit value for the protection of vegetation	Calendar year	30 µg m <sup>-3</sup> NO <sub>x</sub>	19 July 2001
Alert threshold		400 µg m <sup>-3</sup> NO <sub>2</sub> over three consecutive hours	



**Directive Limits (1999/30/EC) continued**

	Averaging Period	Limit Value	Date by which limit value is to be met
Upper assessment threshold for the protection of human health	1 hour	140 $\mu\text{g m}^{-3}\text{NO}_2$ not to be exceeded more than 18 times a calendar year	
Upper assessment threshold for the protection of human health	Calendar year	32 $\mu\text{g m}^{-3}\text{NO}_2$	
Lower assessment threshold for the protection of human health	1 hour	100 $\mu\text{g m}^{-3}\text{NO}_2$ not to be exceeded more than 18 times a calendar year	
Lower assessment threshold for the protection of human health	Calendar year	26 $\mu\text{g m}^{-3}\text{NO}_2$	
Upper assessment threshold for the protection of vegetation	Calendar year	24 $\mu\text{g m}^{-3}\text{NO}_x$	
Lower assessment threshold for the protection of vegetation	Calendar year	19.5 $\mu\text{g m}^{-3}\text{NO}_x$	

The lower assessment threshold for the protection of human health was not exceeded during the measurement period (Figure 6). Similarly, the lower assessment threshold for the protection of vegetation was not exceeded during the measurement period.

NO, NO<sub>2</sub> and NO<sub>x</sub> are measured as ppb (parts per billion) by volume. To convert to µg.m<sup>-3</sup>, a factor (1.25 for NO, 1.91 for NO<sub>2</sub>) is used. No formula is specified for NO<sub>x</sub>, the directive requires it to be expressed as NO<sub>2</sub> (i.e. ppb\*1.91). This applies even when most of the NO<sub>x</sub> is present as NO.

**Fig. 6 NO<sub>2</sub> Hourly Values  
Trailer 2 in Kilkitt 11/9/02-4/3/03**


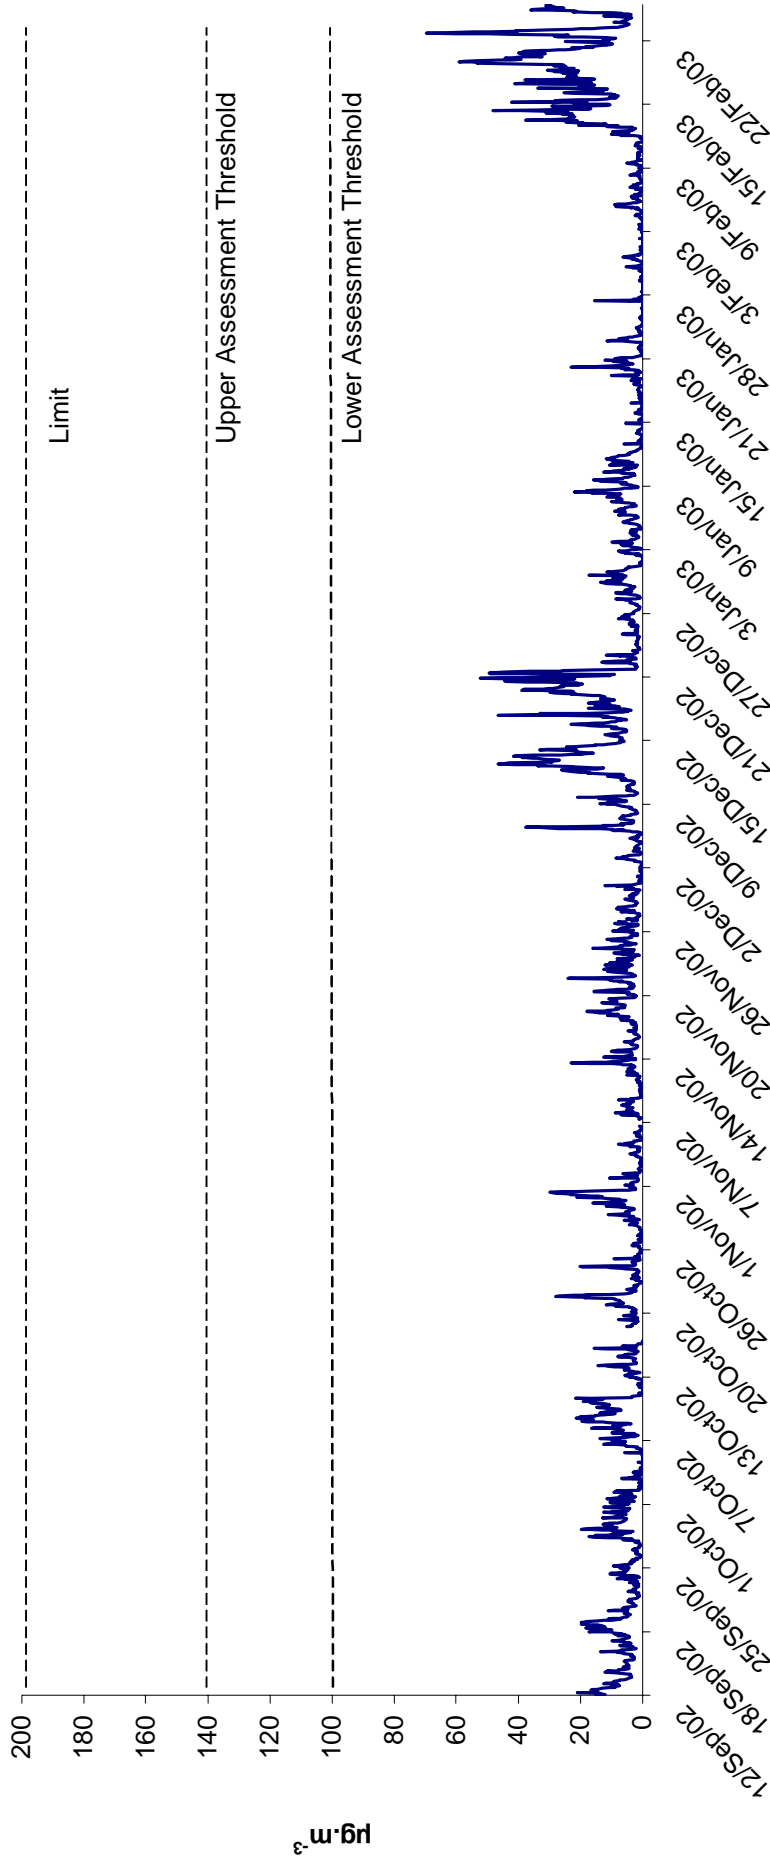


Fig. 7 NO<sub>x</sub> Hourly Values  
Trailer 2 in Kilkitt 11/9/02-4/3/03

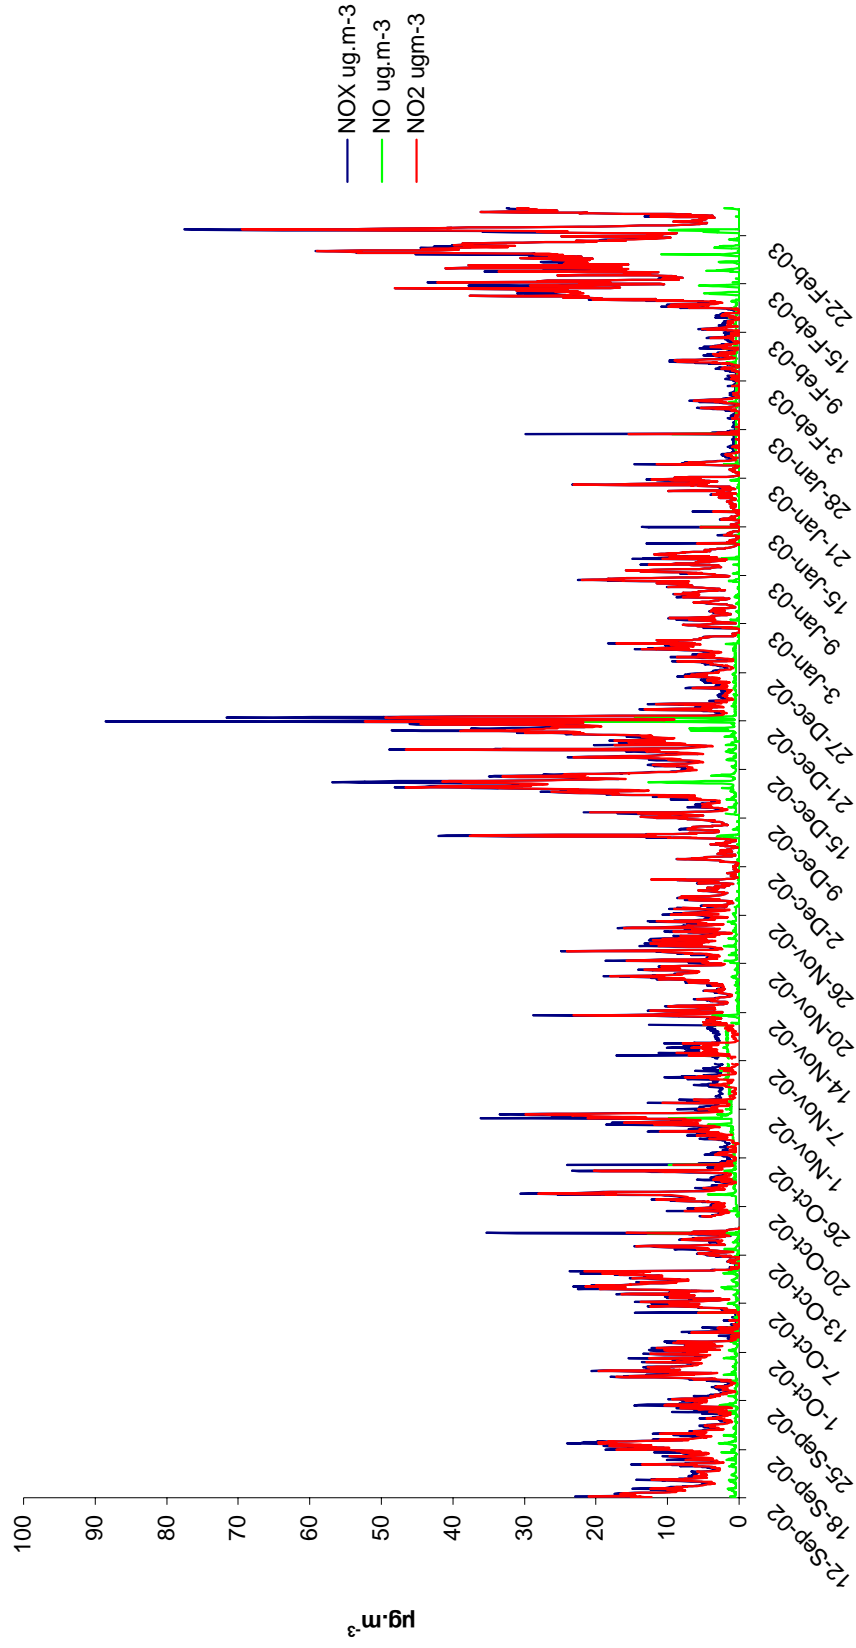

## Particulate Matter

### PM<sub>10</sub> : gravimetric method

No. of days	173
Missing values (including routine maintenance)	80 1
No. of measured values	93
Percentage covered	53.7
Maximum daily value	62.6 $\mu\text{g.m}^{-3}$
98 percentile for daily values	54.3 $\mu\text{g.m}^{-3}$
Mean daily value	13.5 $\mu\text{g.m}^{-3}$

### Directive Limits (1999/30/EC)

#### STAGE I

	Averaging Period	Limit Value	Date by which limit value is to be met
24-hour limit value for the protection of human health	24 hour	50 $\mu\text{g m}^{-3}$ PM <sub>10</sub> not to be exceeded more than 35 times a calendar year	1 January 2005
Annual limit value for the protection of human health	Calendar year	40 $\mu\text{g m}^{-3}$ PM <sub>10</sub>	1 January 2005
Upper assessment threshold for the protection of human health	24 hour	30 $\mu\text{g m}^{-3}$ PM <sub>10</sub> not to be exceeded more than 7 times a calendar year	<i>based on the indicative limit values for 1 January 2010</i>
Upper assessment threshold for the protection of human health	Calendar year	14 $\mu\text{g m}^{-3}$ PM <sub>10</sub>	<i>based on the indicative limit values for 1 January 2010</i>

### Directive Limits (1999/30/EC) Stage I continued

	Averaging Period	Limit Value	Date by which limit value is to be met
Lower assessment threshold for the protection of human health	24 hour	20 $\mu\text{g m}^{-3}$ PM <sub>10</sub> not to be exceeded more than 7 times a calendar year	<i>based on the indicative limit values for 1 January 2010</i>
Lower assessment threshold for the protection of human health	Calendar year	10 $\mu\text{g m}^{-3}$ PM <sub>10</sub>	<i>based on the indicative limit values for 1 January 2010</i>

### STAGE II

	Averaging Period	Limit Value	Date by which limit value is to be met
24-hour limit value for the protection of human health	24 hour	50 $\mu\text{g m}^{-3}$ PM <sub>10</sub> not to be exceeded more than 7 times a calendar year	1 January 2010
Annual limit value for the protection of human health	Calendar year	20 $\mu\text{g m}^{-3}$ PM <sub>10</sub>	1 January 2010

The limit value plus margin of tolerance (60  $\mu\text{g.m}^{-3}$ ) was exceeded on one occasion during the measurement period. Thus, the limit for PM<sub>10</sub> was not exceeded as the limit value needs to be exceeded more than 35 times in a calendar year in order for this to be the case. The 2005 limit (50  $\mu\text{g.m}^{-3}$ ) was exceeded on three occasions during the measurement period. Both the upper and lower 24 hour assessment thresholds were exceeded during the period of the assessment. The upper assessment threshold was exceeded on 11 days while the lower assessment threshold was exceeded on 17 days. The directive states that both assessment thresholds should not be exceeded more than

7 times in a calendar year. Additionally, the average daily  $PM_{10}$  concentration during the assessment period exceeds the annual lower assessment threshold.

**Particulate Matter :  $PM_{2.5}$**

Article 5 of Council Directive 1999/30/EC of 22 April 1999 states that

*“Member States shall ensure that measuring stations to supply data on concentration of PM<sub>2.5</sub> are installed.”*

The concentration of PM<sub>2.5</sub> was measured with an OSIRIS Environmental Dust Monitor in the mobile laboratory. This also measured total suspended particles (TSP), PM<sub>10</sub> and PM<sub>1</sub>. All measurements were hourly values.

The concentration of PM<sub>10</sub> measured by the OSIRIS and that measured using the gravimetric method were compared to give a daily correction factor. The correction factor was used to estimate the concentration of PM<sub>2.5</sub> using the formula:

$$\begin{array}{l} \text{24-hour average} \\ \text{concentration} \\ \text{of PM}_{2.5} \end{array} = \begin{array}{l} \text{OSIRIS 24-hour} \\ \text{average concentration} \\ \text{of PM}_{2.5} \end{array} \times \frac{\text{gravimetric 24-hour average PM}_{10}}{\text{OSIRIS 24-hour average PM}_{10}}$$

*Results:*

No. of days	173
Missing values (including routine maintenance)	80 0
No. of measured values*	93
Percentage covered	53.7
Maximum daily value	43.9 $\mu\text{g}\cdot\text{m}^{-3}$
98 percentile for daily values	36.8 $\mu\text{g}\cdot\text{m}^{-3}$
Mean daily value	7.4 $\mu\text{g}\cdot\text{m}^{-3}$
Median daily value	4.2 $\mu\text{g}\cdot\text{m}^{-3}$



Fig. 8 PM<sub>10</sub> Daily Values  
Trailer 2 in Kilkitt 11/9/02 - 4/3/03


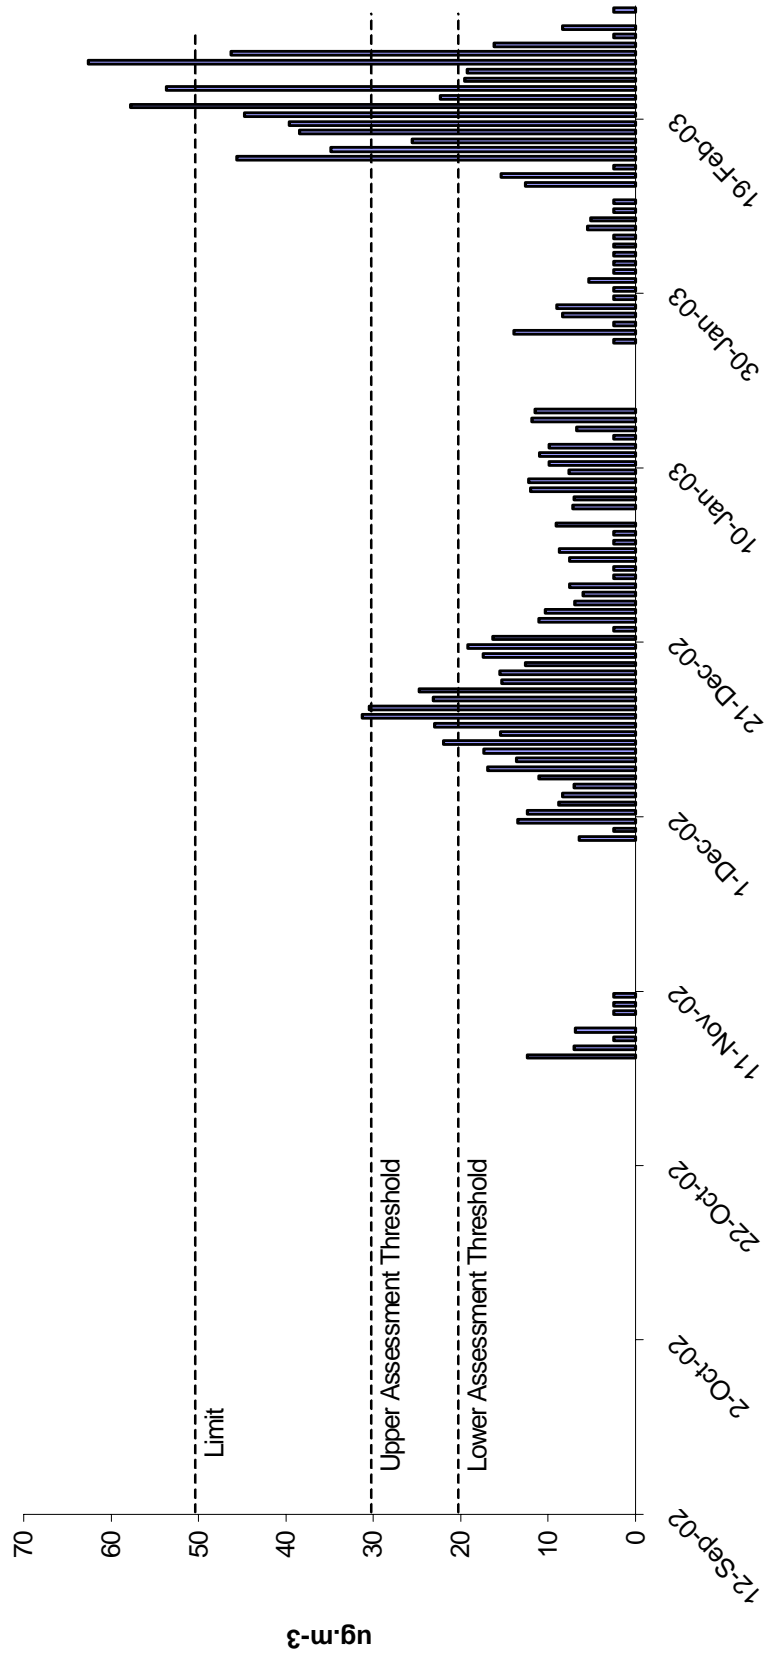


Fig. 9 PM<sub>10</sub> and PM<sub>2.5</sub> Daily Values  
Trailer 2 in Kilkitt 1/9/02 - 4/3/03

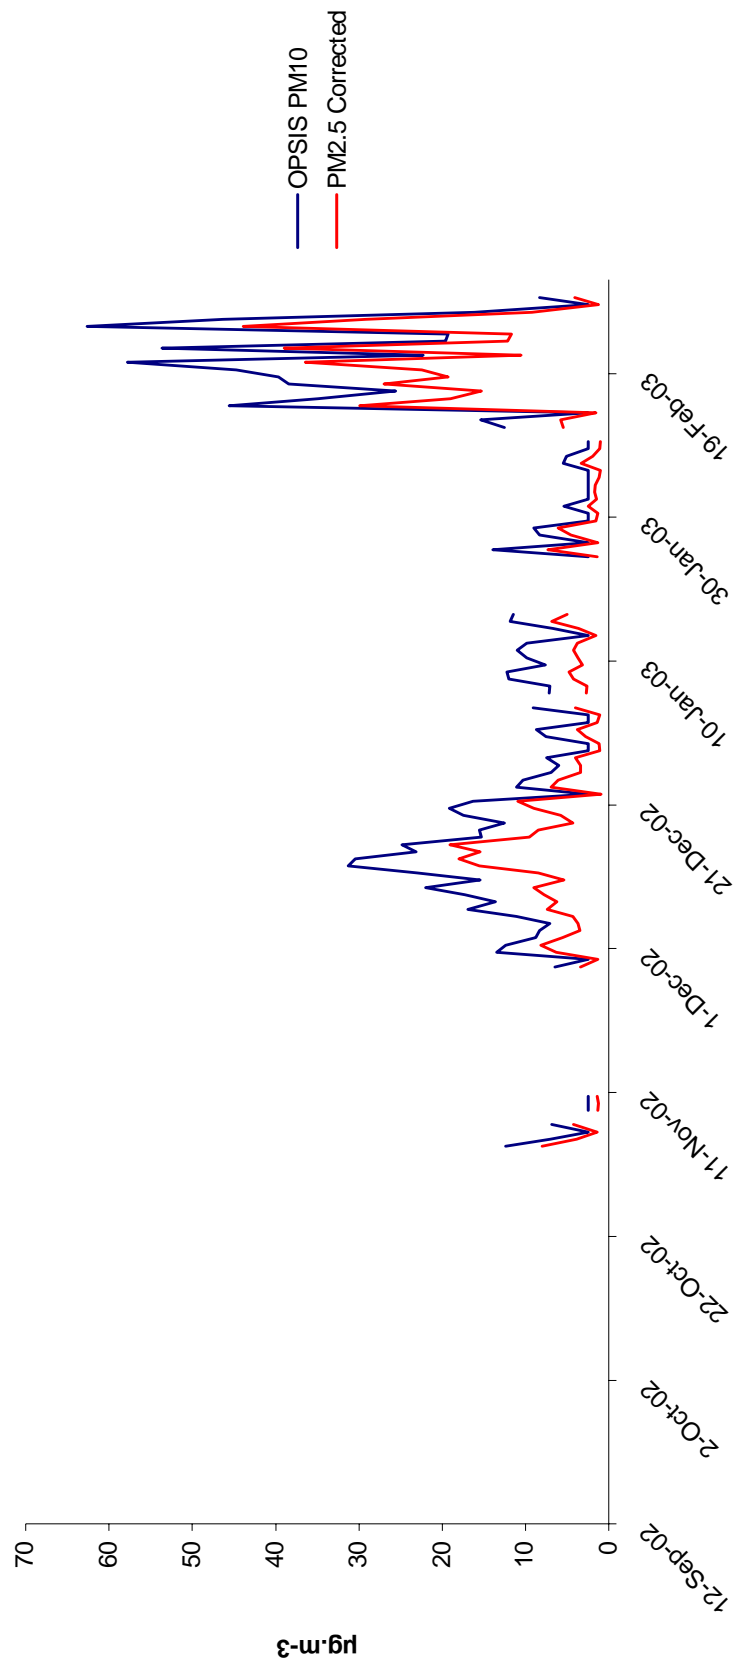

## Benzene


No. of hours	3985
Missing values (including routine maintenance)	2813 2
No. of measured values	1172
Percentage covered	41.7
Maximum hourly value	0.9 $\mu\text{g}\cdot\text{m}^{-3}$
98 percentile for hourly values	0.7 $\mu\text{g}\cdot\text{m}^{-3}$
Mean hourly value	0.2 $\mu\text{g}\cdot\text{m}^{-3}$

### Proposed Directive Limits

	Averaging Period	Limit Value	Date by which limit value is to be met
Limit value for the protection of human health	Calendar year	5 $\mu\text{g m}^{-3}$	1 January 2010
Upper assessment threshold for the protection of human health	Calendar year	3.5 $\mu\text{g m}^{-3}$	
Lower assessment threshold for the protection of human health	Calendar year	2 $\mu\text{g m}^{-3}$	

The lower assessment threshold was not exceeded during the measurement period (Figure 10).


**Fig. 10 Benzene Hourly Values  
Trailer 2 in Kilkitt 11/9/02-4/3/03**

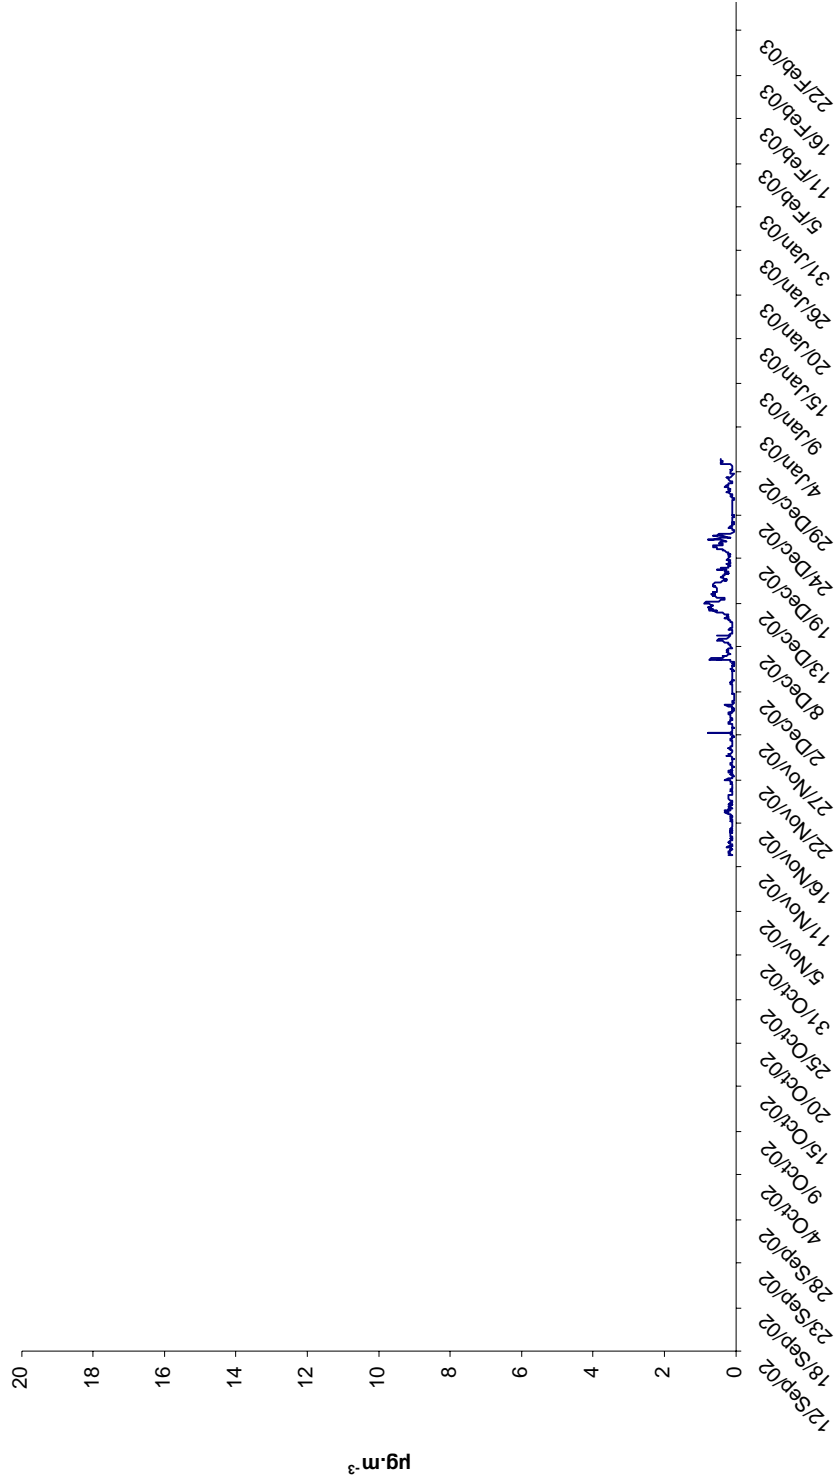

## Toluene

No. of hours	3985
Missing values (including routine maintenance)	2813 2
No. of measured values	1172
Percentage covered	41.7
Maximum hourly value	2.0 $\mu\text{g}\cdot\text{m}^{-3}$
98 percentile for hourly values	1.1 $\mu\text{g}\cdot\text{m}^{-3}$
Mean hourly value	0.3 $\mu\text{g}\cdot\text{m}^{-3}$

**Fig. 11 Toluene Hourly Values  
Trailer 2 in Kilkitt 1/9/02-4/3/03**

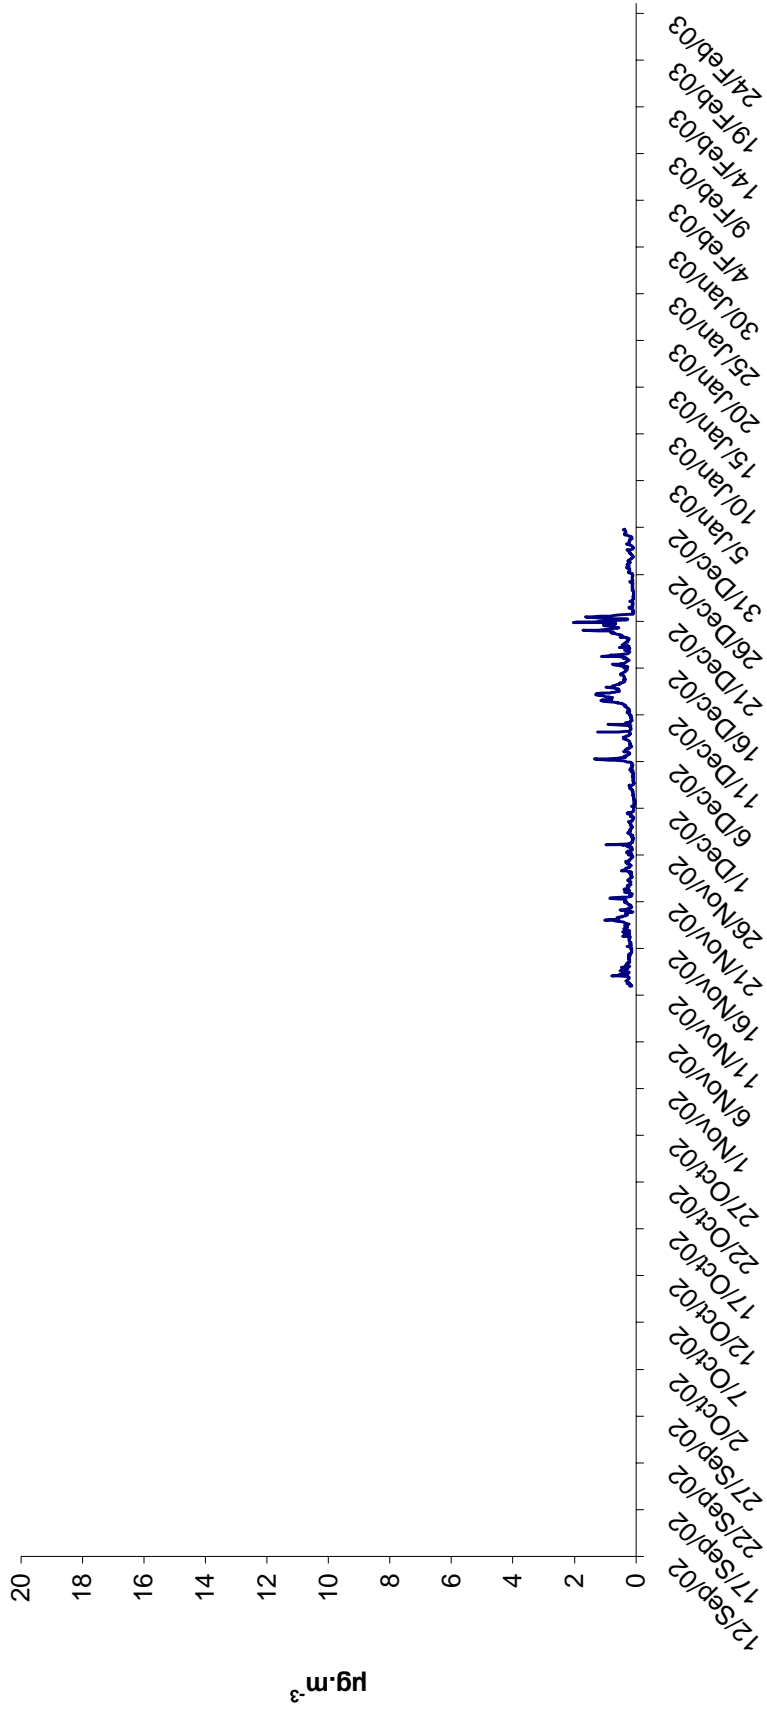

## Lead

No. of days	174
Missing days (including routine maintenance)	0
No. of measured days	174
Percentage covered	100
Concentration of Pb	0.02 $\mu\text{g.m}^{-3}$

### Directive Limits (1999/30/EC)

	Averaging Period	Limit Value	Date by which limit value is to be met
Annual limit value for the protection of human health	Calendar year	0.5 $\mu\text{g m}^{-3}$	1 January 2005
Upper assessment threshold	Calendar year	0.35 $\mu\text{g m}^{-3}$	
Lower assessment threshold	Calendar year	0.25 $\mu\text{g m}^{-3}$	

The concentration of Lead in air did not exceed the lower assessment threshold.

## **Other Metals:**

Annex I of council directive 96/62/EC (Air Framework Directive) lists four metals other than lead to be taken into consideration in the assessment and management of ambient air quality. These are cadmium, arsenic, nickel and mercury. Limit values and measurement methods for these metals as well as certain polycyclic aromatic hydrocarbons will be set out in the fourth daughter directive.

An indicative method was used during this assessment to measure prevailing concentrations of cadmium, nickel and arsenic in air. This method is detailed above and essentially involves pumping air through a filter for several weeks before digesting the filter and analysing the digest for lead and other metals using ICP-MS. The problem with this method is that the detection limit is influenced by any traces of metal in the filter paper as well as by the volume of air passed through the filter. The results, although indicative, do provide some indication of the concentrations of these metals in air.

During this assessment

The maximum concentration of cadmium in air was found to be  $1.6 \text{ ng.m}^{-3}$

The maximum concentration of nickel in air was found to be  $2.2 \text{ ng.m}^{-3}$

The levels of arsenic in air were lower than trace levels of arsenic known to exist on the filter papers